

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
7 April 2005 (07.04.2005)

PCT

(10) International Publication Number
WO 2005/029940 A1

(51) International Patent Classification⁷: **A01B 45/02**,
A01G 1/12

(74) Agent: **GRIFFITH HACK**; Level 3, 509 St Kilda Road,
Melbourne, Victoria 3004 (AU).

(21) International Application Number:
PCT/AU2004/001322

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date:
24 September 2004 (24.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003905259 26 September 2003 (26.09.2003) AU

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*):
GRADEN INDUSTRIES PTY LTD [AU/AU]; 26-28
Scammel Road, Campbellfield, Victoria 3061 (AU).

(72) Inventor; and


(75) Inventor/Applicant (*for US only*): **DRYDEN, Graham**
[AU/AU]; 26-28 Scammel Street, Campbellfield, Victoria
3061 (AU).

Published:

— with international search report

[Continued on next page]

(54) Title: SCARIFIER

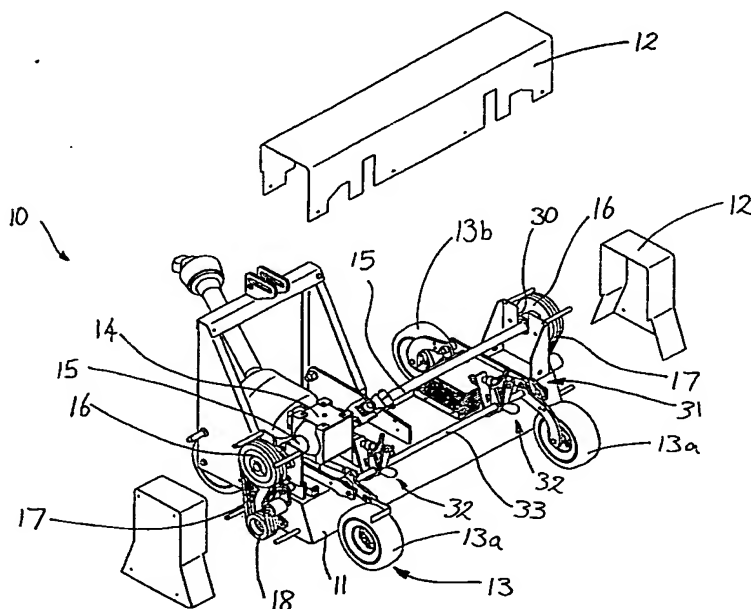

(57) Abstract: A scarifier (10) for cutting turf includes a frame (11) supported on wheels (13) and a plurality of circular cutting blades co-axially mounted on a rotor shaft (18) supported by the frame (11). Driving means (14, 15, 16, 17) drives the rotor shaft (18) to rotate the blades. Adjustment means (31) adjust the relative position of the wheels (13) and the rotor shaft (18), thereby adjusting the height of the rotor shaft (18) off the ground.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.